FOR MYSORE STATE

Agriculture (1954) Departm

RL SERIES.

G.O. NO. 927

Dated 14/6/54

[Despatch Abstract.]

Community Projects - South Kanara area - Block I - communications — Construction of 2 culverts on the road from Ilpady to Shivanthur - Sanctioned by the Project Executive Officer, Mangalore for Rs 972/- Papers recorded

f.C.No.~~1692x2 1692~~/54-B.

Proceedings of the Project Executive Officer, Mangalore dated 26-5-1954.
Sri.H.Narasimha...

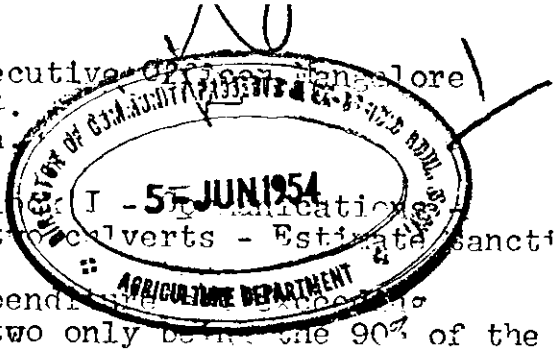

COMMUNITY PROJECTS - South Kanara - Block I - Communications - Road from Kilpady to Shimanthur with two culverts - Estimate sanctioned

---

74494

Sanction is accorded to an expenditure [illegible] Rs. (972/-) nine hundred and seventy two only being the 90% of the estimated cost of Rs. 1080/- for the construction of two culverts on the katcha road from Kilpady to Shimanthur in Block I. The balance of Rs.108/- required to complete the work will be met from contribution from the Panchayat Board Kilpadi which is interested in this work. The sanction is counted against the provision for 100 culverts in Block I in the overall programme. The road which is about 1 mile in length and estimated to cost Rs.1500/- has been formed by the beneficiaries themselves at their own cost and this will be treated as villagers' contribution. It is item No,16 in the list of additional works approved by the Project Executive Committee in December 1953 and added on to the overall programme. The sanction is counted against the relevant provisions in the overall programme.

The expenditure is debitable to 63-B.C.D. Projects - J. Communications - 1 Works.

H Narasimha
29/5

Project Executive Officer.

Submitted to the Director of Community Projects, Madras. 31/5/
(2 copies) with a copy of the sanctioned estimate.
Copy to the Secretary, C.P.A. Rastrapathi Bhavan, New Delhi.
To the Accountant General, Madras.
To the Collector of South Kanara.
To the Inspector of Local Boards & Municipal Councils, Madras for early sanction of expenditure.
To theRegional Inspector of Local Boards, Coimbatore for necessary action
To the Asst.Project Officer, Mangalore. (2 copies)
To the Asst.Engineer with a copy of the estimate.
To the Accountant and B-Clerk.
JC/29-5-54.

Ref.C.No.2372/ 1682/54-B.

Proceedings of the Project Executive Officer, Mangal
dated 28-5-1954.
Sri.H.Meresimha.

COMMUNITY PROJECTS - South Kanara - Block I - Communications - Road from Kilpady to Shimanthur with two culverts - Estimate sanc

---

Sanction is accorded to an expenditure not exceeding Rs. (972/-) nine hundred and seventy two only being the 90% of the estimated cost of Rs. 1080/- for the construction of two culverts on the katcha road from Kilpady to Shimanthur in Block I. The balance of Rs.108/- required to complete the work will be met from contribution from the Panchayat Board Kilpadi which is interested in this work. The sanction is counted against the provision for 100 culverts in Block I in the overall programme. The road which is about 1 mile in length and estimated to cost Rs.150/- has been formed by the beneficiaries themselves at their own cost and this will be treated as villagers' contribution. It is item No,16 in the list of additional works approved by the Project Executive Committee in December 1953 and added on to the overall programme. The sanction is counted against the relevant provisions in the overall programme.

The expenditure is debitable to 63-B.C.D. Projects - J. Communications - 1 Works.

Project Executive Officer.

Submitted to the Director of Community Projects, Madras.
(2 copies) with a copy of the sanctioned estimate.
Copy to the Secretary, C.P.A. Rastrapathi Bhavan, New Delhi.
To the Accountant General, Madras.
To the Collector of South Kanara.
To the Inspector of Local Boards & Municipal Councils, Madras for early sanction of expenditure.
To theRegional Inspector of Local Boards, Coimbatore for nece
To the Asst.Project Officer, Mangalore. (2 Copies)
To the Asst.Engineer with a copy of the estimate.
To the Accountant and B-Clerk.
JC/29-5-54

Report to accompany the estimate for "forming a road from Kilpatrick to Glenarbuck with 2 culverts".

£3+No 2580:=

"This estimate provides the forming a road from Kilpatrick on the Dalry Crinigill road to Glenarbuck a length of 1 mile." There is already a cart track of about 7'-0" wide which requires widening and culverts to remove humps etc. A portion of the new road has already been formed the same in general to gravel and runs on a line to the Dalry Crinigill road. Access to Kilpatrick and Glenarbuck village. Moreover, provision is also made for footpath & railing bridges etc. ..

Two Culverts of 2'-0" clear & 1'-6" high are provided for in the roads at 0, 3 and 20 from the commencement of the 2 culverts 4 ground level with 12 inch Concrete 1:3:10 with random rubble abutments wing returns 1'-6" thick 3'-0" high as shown in plan. The culverts with of Cutstone slabs 3 inches thick second with 2 courses parapet walls 1-3 x 2-6.

Provision is also made for retaining walls and fencing on the East side of the road etc.

DETAILED ESTIMATE.

Making a road from Hill Range to Sherumalai.

Division — Taluk

Village and Survey — Date and cost of original construction

Name and number of work. — Date and cost of last repairs.

Details of work.	Number.	Measurement in feet. Length.	Breadth.	Depth.	Area or contents.	Total quantity of each description of work.
1) Earth work excavation in ordinary soil including raising and depositing earth as required for forming roadway						
0/0 to 0/2	2	660 - 0	6 - 0	1 - 0	7920	
0/2 to 0/4	2	660 - 0	5 - 0	2 - 0	13200	
0/4 to 0/6	2	660 - 0	6 - 0	1 - 0	7920	
0/6 to 1/0	2	660 - 0	5 - 0	2 - 0	13200	
Earth drain & side drains	2/6	660 - 0	2 - 0	1 - 0	21120	
					63360	64 cubic
2) Sentring & Rubble Masonry including providing necessary Centering and Cutting 3" and filling with Earth	8	660 - 0	18 - 0	-	475200	450 cubic
3) Cutting in hard laterite soil for making embankment at certain places and for accommodation works etc						L.S.
4) Petty contingencies and Cutting grass etc						L.S.

Prepared by
4.1.54
Supervising Officer.

Examined
19.1.54
AE.

Details of work.	Number.	Measurement in Feet: Length.	Breadth.	Depth.	Area or contents.	Total quantity such descriptio of work.
Extra						
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	
[illegible]						

Abstract Estimate.

C.T. 1[illegible] (2).

Quantity. (1)	Description of work. (2)	Item number in the schedule of rates. (3)	Rate. (4)			Per (5)	Total. (6)			Amount. (7)		
			Rs.	A.	P.		Rs.	A.	P.	Rs.	A.	P.
64 lin ft	Earthwork excavation in all sorts excepting rock		18	10	-	1000 lineal feet	1208	-	-			
450 lin ft	Scarcheing sides to the width required & cutting to the level		0	4	6	1000 lineal feet	126	-	-			
L.S	Cutting in hard soil for making road in embankment -											
	as per accompanying lines of levels					L.S	100	-	-			
	Petty surpassing & contingencies						66	-	-			
							1500	/	=			

Estimated by me
14.1.54

DETAILED ESTIMATE.

298,636—28-9-50,— C.F. 150 (2).

11

Construction of Culverts on Tilhedy-Shivamoggin Road

Villages and Survey

Name and number of work.

Taluk

Date and cost of original construction

Date and cost of last repairs.

Details of work.	Number.	Measurement in feet. Length.	Breadth.	Depth.	Area or contents.	Total quantity of each description of work.
Earth work excavation in all Soils excepting rock or hard murum etc. Collecting materials lead and lift.						
For foundation	1×2	16-0	2-6	3-0	240	
Return	2×2	2-0	2-6	3-0	60	
Extra for siphons etc		—	—	—	700	
					1000	Cft.
Concrete broken stone in Cement & sand 1:5:10.						
Foundation	1×2	16-0	2-6	1-0	80	
Return	2×2	2-0	2-6	1-0	20	
					100	
Random rubble masonry in Cement & sand 1:6						
Abutments	2	15-0	1-6	3-0	135	
Return	4	2-0	1-6	3-0	36	
Coutary stone	2	15-0	0-8	0-6	11	
Parapet	2	8-6	1-3	2-6	54	
Extra for Return				1/3	14	
					250	Cft.

270

V

C.P. 100 (1)

Details of work.	Number.	Measurement in Feet. Length.	Breadth.	Depth.	Area or contents.	Total quantity of each description of work.
4) Cut stones line sides dressed for slab — Deck slab	1	15-0	3-6	0-5	22 Cft	
5) Plastering with Cement mortar 1:5 — Parapet	2	8-6	6-0		102	
Sides	4	1-3	2-6		12	
					114	@ 125 Sft
6) Langhstone dry packing to revetment — revetment	4	10-0	3-0	1-0	120	@ 150 Cft.
7) Petty supervision and Contingencies					Ls —	

Lawrence
9.1.54
Superintending Engineer

L. A. Co
10/1/54

P.W.D. V–39—57,603—4

Data sheet to accompany the estimate for Culvert

Kilpauny Ettumanur Road

Quantity.	Description of work.	Rate.	Per	Amount.	Total.
		Rs. A. P.		Rs. A. P.	
	Earth work excavation in ordinary soil not requiring blasting				
1000 Cft	" as 20%	21 6 -	1000 Cft	21 6 -	
	Cement mortar 1:5				
100 lbs	Stone	2 8 -	1000 Cft	2 6 -	
" Cft	" laid 24 Cft 24 No.	19 9 -	"	19 9 -	
20 lbs	Cement . . .	87 8 -	Cask	70 - -	
25 Cft	Sand 30 M Road .	75 12 6	1000 Cft	15 2 6	
100 Cft	Mixing Charges .	4 8 -	"	4 8 -	
	Sundries		Cft	0 4 6	
				112 - -	100 Cft
	Concrete broken stone in Cement mortar 1:5:10.				
92 Cft	metal 1½" Size	23 - -	1000 Cft	21 2 6	
46 Cft	mortar . . .	112 - -	"	51 8 3	
½	Mason 2nd Class .	2 12 -	each	1 6 -	
1.5 No	Man Mazdoor .	~~0 12~~ 1 8 -	"	~~3 12~~ 7 8 -	
4 No	Woman "	0 13 -	"	3 4 0	
92 Cft	Sand 24 C.T.	14 1 -	1000 Cft	12 15 -	
	Sundries		Cft	0 4 3	
		98 0 0		98 0	100 Cft
	Random rubble masonry in Cement mortar 1:5.				
110 Cft	Rough stone . .	16 - -	100 Cft	17 9 7	
34 Cft	mortar . . .	112 - -	"	38 1 2	
5 No	Mason 2nd Class	2 12 -	each	13 12 -	
4 No	Man Mazdoor	1 8 -	"	6 - -	
4 No	Woman "	0 13 -	"	3 4 0	
1100 Cft	Sand as above	14 1 -	100 Cft	15 7 6	15 7 6
	Sundries			1 9	1 9
				94 4 -	100 Cft
	Cut stone 3 sides dressed				
	as per				
	for each				
	Cut as per				

1

P.W.D. V–39—57,603—4-4-

Data sheet to accompany the estimate for_____

Quantity.	Description of work.	Rate. Rs.	A.	P.	Per	Amount. Rs.	A.	P.	T
b)	Plastering with Cement mortar								
50 Cft.	mortar.	112	-	-	1000	5	9	7	
1 No	Brick Layer.	2	12	-	ea	2	12	-	
½	Clean Coolie.	1	8	-	"	0	12	-	
1	Woman "	0	13	-	"	0	13	-	
	Sundries				CS	0	5		
						10	-		
7)	Neighbature dry packing for revetm								
100 Cft.	Rough stone	16	-	-	1000	17	9	7	
1 No	Woodman	3	0	-	ea	3	0	-	
3 No	Woman Coolies	1	8	-	"	4	8	-	
2 No	Woman "	0	13	-	"	1	6	-	
100 Cft	lead as above	14	-		1000	15	7	6	
	Sundries					0	2	11	
						42	4	-	
Certified that the rates and lead are correct to the best of my									

Abstract Estimate.

Quantity. (1)	Description of work. (2)	Item number in the schedule of rates. (3)	Rate. (4) Rs.	A.	P.	Per (5)	Total. (6) Rs.	A.	P.	Amount. (7) Rs.	A	P.
000 cft	Earth work excavation in all sorts		21	0	0	000 cft	21	-	-			
000 cft	Concrete Cement 1:5:10		98	0	0	100 cft	98	-	-			
			196	0	0		236	-	-			
250	Rubble masonry in C.M. 1:5		94	4	-	Rs.	245	-	-			
120	Cut stone 3 sides dressed for beds		4	-	-	1 cft	58	-	-			
258	Plastering with C.M. 1:5		10	-	-	100 sft	13	-	-			
							63	0	0			
1500	Langhone dry packing for underneath		4	4	-	"	66	-	-			
LS.	Allow contingencies					LS	21	-	-			
							560	-	-	540	0	0
	For 2 Culverts		540	-	-		1080	-	-			
	at 0/3 & 0/9		300	-	-	x2	600	-	-			

Supervision charges at 5 per cent

Grand Total Estimate .. 1089 -

Divisional officer (or other countersigning officer to be named).

Sanctioned for 194 -194 .

Signature and designation of the officer submitting this estimate.

Collector or other sanctioning officer (to be named).

Tahsildar or other officer (to be named).

District

Taluk

Village No.

64AF
54

Name of work No. Construction of 2 Cabins for the Library & Examination Hall

---

Technically sanctioned
1080/- (Rupees one thousand and eighty only)

ESTIMATE ABSTRACT.

L. A. Gowda
Assistant Engineer
Mangalore

Budget head

Estimate No 28/54-55

(C No 482/54-B)

Main head

Sub-head

Estimate - Rs. 1080/

Contribution - Rs 108/- (in addition to Rs 1500/- by work costing Rs 1500/-)

Sanction - Rs. 972/-

1080/-

Amount of Estimate

Sanctioned Rs (972/-) Nine hundred and seventy two only

Sanction number and date

Project Executive Officer
26/5/54

To be carried out by

25.5.54.

GENERAL. **Abstract Estimate.** 11

Quantity.	Description of work.	Item number in the schedule of rates.	Rate.	Per	Total.	Amount.
(1)	(2)	(3)	(4)	(5)	(6)	(7)
			Rs. A. P.		Rs. A. P.	Rs. A. P.
1)	Earth work for stopping the road of 1 mile in length & drains				1500 - -	
2)	Constructing 2 Culverts - Pakki road for keeping the Shema in cyclone Default				1000 - -	
			Do Total		2580/=	
	Supervision charges at 5 per cent					

Grand Total Estimate .. 2580/=

Divisional officer (or other countersigning officer to be named).

Sanctioned for 194 –194 .

Signature and designation of the officer submitting this estimate.

11.1.52 AE

Collector or other sanctioning officer (to be named).

Tahsildar or other officer (to be named).

Taluk

Village No.

Name of work No. — Forming a road from Kilpauk to Shenoy Nagar & Culverts.

ESTIMATE ABSTRACT.

Budget head

Main head

Sub-head

Amount of Estimate

Sanction number and date

To be carried out by

C.P. 150 (2).

199,169—17-11-32.

PUBLIC (R.D.P.VI) DEPARTMENT.

Extracts from the Call Book.

1. Serial No.	90
2. Date of entry in the register.	17/6/54.
3. Subject.	C.P.S. S.R. area - Pgn. I - Comms - Construction of 2 culverts on the Road from Kilpady to Sirthi - Sanctioned by the P.C.O. Mangalore Rs 972/- Papers recorded
4. Old Current No.	74494 D VI/54
5. No. and date of Govt. Order etc. authorising the entry.	G.O. Rt 927 Agri dt 14/6/54.
6. Date when further action is to be taken.	25/6/55 ~~1964~~ (A)
Number and date of new current.	4447/ Pub (RDP VI)

The extract above has been made with 'H' orp 1964

In

In view of the latest orders of Govt dispensing with the submission of such completion reports, this may be kept and added to the dis posal at (?)

28/6/55

27/6/55

27/6/55

L /Hgn(2)

C No 74494/54 | Sub:- CPs. S.K. Area. Block I. Communications- Construction of 2 culverts on the kutcha roads from Kilpady to Shiranthur- Sanctioned estimate.

p/cf | Ref:- From the PEO. Mangalore ref. C No 482/54-B dated 26-5-54

Please see the proceedings of the PEO. Mangalore at p/cf sanctioning an expenditure of Rs 972/- out of an estimate for Rs 1080/- for construction 2 culverts on the road from Kilpady to Shiranthur. The balance ie Rs 108/- is to be met by the Panchayat Board of Kilpadi. The road 1 mile long has been formed by the villagers at a cost of about Rs 1500/-.

The work of culverts is covered by the provision in Block I, for 100 culverts as included in the overall programme, even though the roads is one approved by the Project Advising Committee subsequently.

The estimate has been approved by the AE(C). The papers may be recorded as a Rt. G.O. with a call book entry for 12 months to watch the Completion of the work

Notes in Register of works

11.6.54 14/12/6/54.

G.O. Rt. 927 dated 14-6-54

Abstract:- CPs- S. Kanara Area- Block I. Communications- Construction of 2 culverts on the road from Kilpady to Shiranthur for Rs 972/- Sanctioned by the PEO. Mangalore- Papers recorded

11.6.54 14/12/6/54.

[CB: 12 months]

Entered S. no 90 KB 17/6.